

Passenger Information System

commute in a smarter way!

Industrial Board and System Solution - Your OEM/ODM Partner




- AMIX-V1K0**
- AMD Ryzen Embedded V1000 Series
 - Mini-ITX Quad Display
 - Low Profile
 - 4x HDMI v2.0b 4K@60Hz



- IPPS-1768-SKL2-EP00-4000**
- Intel Skylake-U Series
 - 17" LCD , 1280 x 1024 pixel
 - 10 points P-CAP touch screen
 - Front IP65 · 1,600 nits



- IBOX - APL0 D TYPE**
- Fanless Box system with Intel® ApolloLake SoC
 - Dual display: HDMI/DP
 - DC 12, 18 ~ 36V input
 - Wide temperature: 0°C ~ 60°C

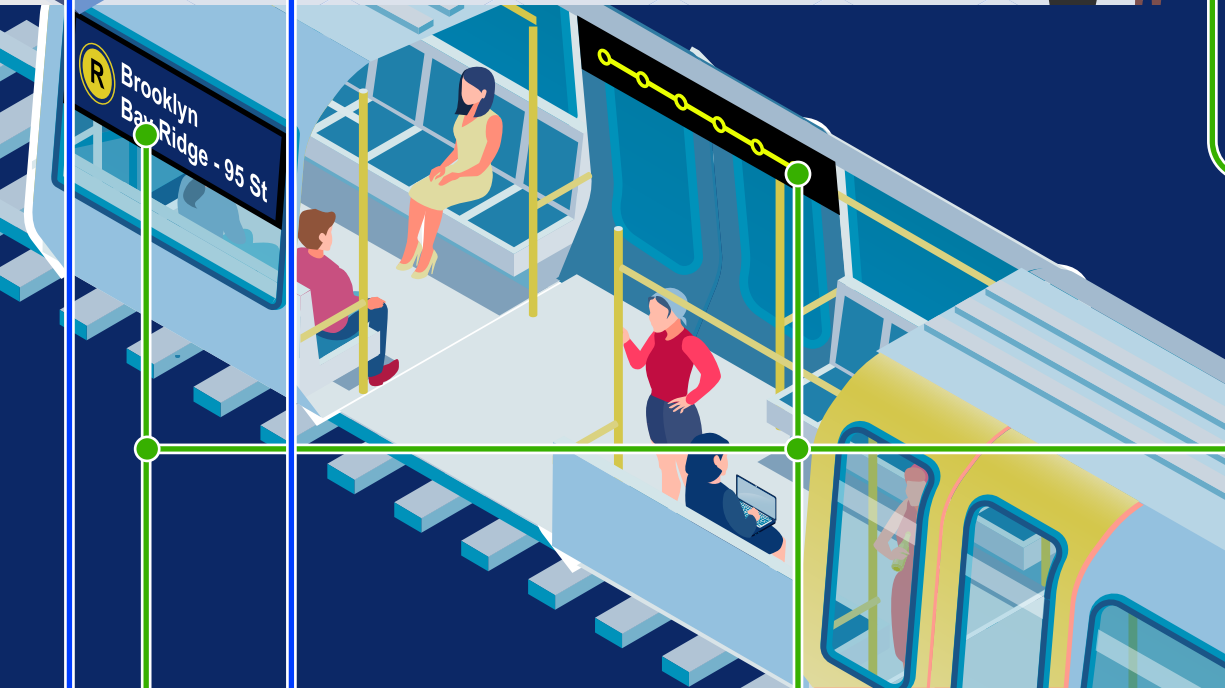

AMIX-KBL1

- Intel® Q170/H110 based Mini-ITX Motherboard Supports 7th Generation
- Core™ KabyLake Series i7/ i5/ i3 Processors
- HDMI/2x DP/eDP(LVDS), 2x SATA III, 4x COM, 8x USB, Dual GbE LAN.



ITRP-2845-SKL2-WG00

- Intel® 6th Skylake mobile processor support
- 1920 x 357, 1,000 nits
- EN50155 certificated for railway
- Full IP65 and fanless design
- Support 24/36/48/72/96/110 VDC
- Anti-Shock and vibration



ITRP-3805-SKL2-WG00

- Intel® 6th Skylake mobile processor
- 1920 x 357, 1,000 nits
- EN50155 certificated for railway
- Full IP65 and fanless design
- Supports 24/36/48/72/96/110 VDC
- Anti-Shock and vibration



APWR-2000

- 200W DC/DC 24V~110V Input / 12V output ISOLATION
- EN50155 Power Converter Board



ASKM-CFL0 (SKM Module)

- Intel® 8th Gen. Coffee Lake-S processor (up to 65W)
- Intel Q370 Chipset, 2x DDR4 SO-DIMMs
- M.2 E-Key 2230 (WiFi) and M.2 M-Key 2280 (SSD)
- Intel® I219-LM Gigabit LAN
- Intel® vPro™, iAMT v11.0, TPM v1.2 or v2.0
- Intel SKM Golden Finger



AEXP-SKM0 (SKM/SDM Carrier Board)

- Support Intel® SKM / SDM Module
- HDMI, LVDS, V-by-One 4K@60Hz
- Mini-PCIe (1 x w/ uSIM), M.2 M-Key 2280 (SSD)
- SATA III, 6x COM, UART, 8x USB, RJ45 LAN, 2x Audio Jack, 2x I2C, FAN, GPIO, GSPi

Industrial Board

System Solution



Note: All Specifications are subject to change without notice.

